

RD8000™



Universal precision
cable and pipe locator



Radiodetection®
AN SPX COMPANY

Ergonomic design

Light weight, with high contrast LCD display providing clear information in any light condition.

iLOC™

Save time by remotely controlling the transmitter using an advanced long range *Bluetooth*® link.

SurveyCERT™

Share RD8000 data with PC or PDA applications for reporting, audit and analysis.

Centros™

Improves the accuracy and repeatability of measurements and delivers unprecedented responsiveness in the field.

RD8000

Delivering fast, accurate, reliable and repeatable locate data.

The RD8000™PDL and PXL are powerful multifunctional pipe and cable locators designed for use across the pipe and cable location industry. With several unique features, the RD8000™ delivers speed, accuracy and reliability, yet remains a cost-effective solution for any application. Designed with the latest digital architecture and software, RD8000™ delivers a highly accurate, controllable and reliable locate solution to service any industry, anywhere in the world.

Ergonomics

The RD8000 is ergonomically designed to deliver a superior performing locator that provides the user with a light weight, energy efficient and exceptionally well balanced tool. At only 1.9 kg, the RD8000 is comfortable for extended periods of use. Despite its weight and form, the RD8000 retains the environmental durability associated with an IP54 rating, meaning you can operate it in almost any environment. The locator and transmitter both feature large, high contrast, backlit LCD screens that provide the user with clear information in any light conditions. The intuitive and responsive user interface has easily identifiable icons that are consistent across the locator and transmitter range, ensuring straightforward operation.

Centros™

All RD8000 units are Centros™ enabled. Centros is a measurement engine based on more than 30 years of continuous development, combining new and innovative algorithms with established software on a high-performance processor core. Centros improves location accuracy and repeatability and delivers timely responsiveness in the field.



iLOC™

iLOC™ is an advanced long range Bluetooth® link between the RD8000 locator and transmitter that helps save the operator time and effort. iLOC allows the operator to control the transmitter remotely using a number of unique features.

With iLOC you can spend less time walking and more time locating. iLOC™ operates at distances up to 300 meters (328 yards) line of sight providing an operator with a fast and unique means of conducting a survey.

iLOC applications supported are:

- **SideStep™** – enables an operator to move the transmitter frequency slightly above the selected frequency enabling locates in areas prone to interference or where multiple operators are locating.
- **Frequency Select** – choose an active frequency on the RD8000 and synchronously change the transmitter frequency to match.
- **Power Management** – an operator can adjust the output power of the transmitter to optimize output signal, leading to efficient use of transmitter batteries.
- **Transmitter remote sleep/wake** – enter standby mode to prolong battery life. Conveniently wake the transmitter with a simple key press on the locator. Transmitter can be set to standby mode each time passive location is carried out.



eCAL™

Validate your RD8000 against its original factory calibration using Centros™ Manager on your own PC.

TruDepth™

Indicates depth when the locator is oriented correctly above the target for the most accurate reading.

Dynamic overload protection

Allows use of locator in areas where excessive signals are present.

Peak/Null Mode

Simultaneous screen view with proportional arrows enables swift identification of magnetic field distortion due to ground effects or nearby utilities.

SurveyCERT™

SurveyCERT™ gives the operator the tools to pass survey information to third-party applications for audit, analysis and reporting. With the RD8000, the operator can store and review up to 1000 locate records. Upload this information to a PDA or PC using the RD8000 Bluetooth® connection and you can instantly view the data using the SurveyCERT™ graph program. If the PC/PDA has a GPS receiver, SurveyCERT™ will automatically add the timestamp and position to the record. Built for interoperability, SurveyCERT™ data is compatible with commercial Geographical Information System (GIS) package.

eCAL™

eCAL™ is a novel Radiodetection technique that allows the operator to validate the original factory calibration of the RD8000. This means the operator has confidence that the locator continues to meet its factory calibration. eCAL™ can issue and print a validation certificate without needing to return the RD8000 to a service center.

TruDepth™: gives the operator the confidence that the depth reading is accurate by only indicating a locate depth when the locator is correctly oriented directly above the pipe/cable.

Dynamic Overload Protection: extends the RD8000 operation into areas where other products fail. In electrically noisy environments, particularly in areas where very large signals are present, it automatically filters out unwanted signals allowing the operator to work effectively in areas such as power substations and overhead railway HV cables.

Peak/Null Mode: is a tool to identify the effects of field distortion due to ground conditions or nearby utilities. Simultaneous display of Peak bar graph response and proportional Null arrows allow a quick assessment of locate conditions.

StrikeAlert™: reduces the risk of accidents by detecting shallow power cables and alerting the operator with an audio warning.

Passive Avoidance: allows the operator to survey the ground quickly using simultaneous detection of Power and Radio signals carried on underground pipes or cables. The RD8000 provides real audio to differentiate the relative proportions of Power and Radio signals present.

Compass: Provides the operator with a visual indication of the target cable or pipes direction. With this feature, the operator can easily follow the target line and then position the locator correctly to maximize depth accuracy.

Fault Find: is a technique that enables an operator to locate a cable fault using an A frame attached to the Locator. On-screen arrows help show the fault's direction and help the operator locate the fault accurately to within 1 meter (39 inches).

CD (Current Direction): A method of identifying a target cable amongst a number of parallel cables using CD direction arrows. With CD the operator can locate a target quickly and eliminate wasted time following faulty trails.

The RD8000 represents the latest in electromagnetic locator technology. Designed to meet our customers' needs, the RD8000 provides a highly controllable, intuitive, cost-effective and reliable solution for any application, building on the reputation that Radiodetection has for supplying highly accurate, reliable and robust location products.

Additional features

- Power, Radio, CATV and CPS passive modes
- 50Hz to 200kHz active frequency bandwidth
- Single antenna mode
- Peak Mode
- Null Mode
- Peak/Null Mode
- TruDepth™
- Current Measurement
- Real sound
- Selectable language
- Selectable battery type
- Selectable frequency and function set
- Selectable antennae modes
- Settings saved on power down

Support Features

- USB port for upgrades using Centros™ Manager
- Online warranty registration for software and feature upgrades
- Compatible with RD4000 accessories
- High visibility reflective labels

User configurable features

- Selectable 50/60Hz
- Selectable metric/imperial

High contrast LCD with auto-backlight operates from -20 to +60° Celsius (-4 to 140° F)

Splash-proof keypad

Intuitive on-screen menus make the RD8000 easy to setup and provide easy access to advanced features



Powered by 2 x NiMH or alkaline LR20 (D-Cell) batteries, or optional rechargeable battery pack


Accessory connections

Headphone connection



High visibility reflective safety arrows

SurveyCERT™

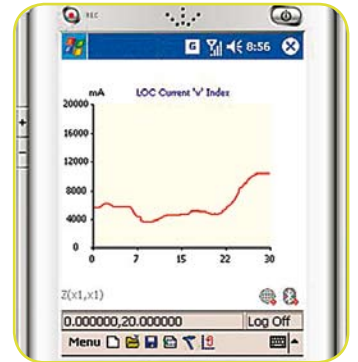

Stored data from RD8000 transferred by Bluetooth® may be displayed on a PC or PDA using Radiodetection's SurveyCERT™ application

High contrast LCD with auto-backlight operates from -20 to +60° Celsius (-4 to 140° F)

Splash-proof keypad

iLOC™

Ergonomic, robust ABS shock resistant and water resistant plastic case ensures reliable use in hostile environments

Ergonomic robust ABS case

Base tray for accessories

Powered by 8 x NiMH or alkaline LR20 (D-Cell) batteries, or optional rechargeable battery pack



Passive avoidance

Rapidly survey an area using power and radio signals simultaneously.

Compass

Visually follow the target cable or pipe orientation with the dynamic line indicator.

SideStep™

Lets the operator adjust the transmitter frequency to avoid unwanted interference.

CD

Current direction arrows allow identification of target utility, eliminating faulty trails on parallel conductors.

RD8000PXL

The RD8000PXL is the industry standard high performance cable and pipe locator. It has a broad range of active, passive and sonde frequencies as well as a number of unique user features supplied as standard.

RD8000PDL

Radiodetection's most advanced cable and pipe locator delivers a broader range of frequencies and sophisticated fault-finding capabilities. It has all the features of the RD8000PXL and a larger range of active and passive frequencies (including CATV and CPS) plus Current Direction (CD), and Fault Find (FF) modes.



RD8000 product features comparison table

Model No.	RD8000PXL	RD8000PDL
Passive frequencies:		
Power/Radio	✓	✓
CATV / CPS		✓
Active frequencies:		
ELF (98/128Hz)		✓
570Hz		✓
577Hz	✓	✓
512Hz	✓	✓
640Hz	✓	✓
760Hz		✓
870Hz	✓	✓
920Hz		✓
940Hz	✓	✓
8kHz	✓	✓
9.8kHz		✓
33kHz	✓	✓
65kHz	✓	✓
83kHz	✓	✓
131kHz	✓	✓
200kHz	✓	✓
CD pairs:		
256Hz		✓
285Hz		✓
320Hz		✓
380Hz		✓
460Hz		✓
Sonde frequencies:		
512Hz	✓	✓
640Hz	✓	✓
8kHz	✓	✓
33kHz	✓	✓
Peak Mode	✓	✓
Null Mode	✓	✓
Peak/Null Mode	✓	✓
Single Mode	✓	✓
Fault Find CD & 8K		✓
Current Direction (CD)		✓
Centros™	✓	✓
Compass	✓	✓
SurveyCERT™	✓	✓
TruDepth™	✓	✓
Dynamic overload protection	✓	✓
StrikeAlert™	✓	✓
Passive Avoidance		✓
Depth on Power		✓
eCAL™	✓	✓
iLOC™	RD8000PXLB	RD8000PDLB

Fully digital platform

Triband $\Delta\Sigma$ design provides the transmitters with unparalleled flexibility of power, frequency and control.

Robust

Constant current delivered from 200Hz to 200kHz meets the highest demands of reliability and performance.

Power management

The operator can control transmitter output power remotely using iLOC™.

Range of transmitters

1 Watt, 3 Watt and 10 Watt power ratings and features suitable for a broad range of applications.

RD Transmitters

Based on a fully digital platform, the new family of Radiodetection transmitters support the entire range of Radiodetection RD7000 and RD8000 cable and pipe locators.

The Tx-1 is a low power transmitter. The Tx-3 has a higher current and induction capability as well as Fault Find. The Tx-10 has the highest current capability with both Fault Find and CD modes as standard.

All models feature a three-stage phase sensitive amplifier that delivers a ground-impedance compensated, constant current across its entire bandwidth in either direct connect, clamp or inductive mode. The transmitters use less power and are ergonomically designed to deliver superior performance in a new light-weight, well-balanced case.

The transmitters are 10% lighter than the industry standard T10 yet each is IP54 rated to cope with demanding environmental conditions. Each model has a removable accessory tray and a weatherproof battery compartment. A large, high contrast, backlit LCD screen provides the user with clear information. The interface is intuitive and responsive, allowing the operator to access any feature with ease.

SideStepauto™: allows the transmitter to calculate the optimum frequency based on ground impedance. The transmitter uses this information to optimize the active frequency. SideStepauto™ helps to improve locate accuracy and extends battery life.

All models are compatible with the complete range of RD7000 and RD8000 frequencies in both inductive and direct connect modes. The transmitters use 8 D-cell batteries and can be powered from a vehicle using a 12V cable plug (it is recommended that an approved Radiodetection isolation transformer is used).

As an additional feature, each model has a multimeter function providing measurement of output voltage, line voltage, current, impedance and power.

To support the extended RD8000 iLOC feature set, the Tx-3 and Tx-10 can be ordered with integrated iLOC.





Transmitter features

- Three power versions: 1 Watt, 3 Watt and 10 Watt
- 8KFF – locates faults from short circuit up to 2M Ω
- CDFF – for long distance fault finding
- 5 CD paired low frequencies
- Current delivered at 30V or high voltage mode (90V for high impedance operation)
- The transmitters have 200Hz to 200kHz active frequency range
- Selectable modes support RD7000 and RD8000 specific model locator frequency ranges
- 8 inductive frequencies
- iLOC™ (on Tx-3B and Tx-10B only)
- SideStepauto™
- Transient overvoltage protection
- Multimeter function
- 8 D-cell battery cassette (rechargeable battery pack option available)
- Accessory tray (for ground stake, direct connect leads and earth reel)
- Plug and play accessories (compatible with RD4000 transmitter accessories)
- External 12V DC operation (using Radiodetection isolation transformer)
- Click-touch splash-proof sealed keypad
- High contrast LCD

Model No.	Power (Watt)	iLOC™	Active frequencies	Induction frequencies	Induction field strength	8KFF	CD	Frequency mode	Standby power mode
10/RD TX1	1		15	8	0.7			Manual	
10/RD TX3	3		15	8	0.8	✓		Manual	
10/RD TX3B	3	✓	15	8	0.8	✓		iLOC™	✓
10/RD TX10	10		15	8	1	✓	✓	Manual	
10/RD TX10B	10	✓	15	8	1	✓	✓	iLOC™	✓

An RD8000
to address
any utility...



TECHNICAL SPECIFICATIONS FOR RECEIVER AND TRANSMITTER	
Sensitivity	6E ⁻¹⁵ Tesla, 5μA at 1 meter (33kHz)
Dynamic range	140dB rms/√Hz
Selectivity	120dB/Hz
Depth accuracy [□]	Line: ± 5% tolerance 0.1m (4") to 3m (10ft) Sonde: ± 5% tolerance 0.1m (4") to 7m (23ft)
Maximum Depth*	Line 6m (20ft), Sonde 15m (50ft)
Locate accuracy	± 5%
CD Fault-Finding (CDDF)	5 CD pairs
Fault-Finding (FF)	Diagnose cable sheath faults from short circuit to 2MΩ using the A-frame
Batteries	Rx: 2 x D-cells (LR20) Tx: 8 x D-cells (LR20)
Battery life	Rx: 30 hours intermittent Tx: use dependent on signal conditions typically 15 hours
Warranty	36 Months upon registration
Dynamic overload protection	30dB (automatic)
Compliance / Approvals	FCC, RSS 310 RoHS, WEEE, CE, Bluetooth®
Weight	Tx: = 2.84kg (6lbs) (including batteries) 4.2kg (9lbs) (including accessories) Rx: =1.87kg (4lbs) (including batteries)
Environment	IP54

[□]In good conditions.

*RD8000 will locate to greater depths but with reduced accuracy.

Trademarks and Notices.

Our products are covered by the following intellectual property rights:

The following are trademarks of Radiodetection:


iLOC™, TruDepth™, SideStep™, SideStepauto™, SurveyCERT™, RD7000™, RD8000™, Centros™, eCAL™.

The Design of the RD7000, RD8000 and transmitters has been registered.

The Design of the 4 chevrons has been registered.

The Bluetooth word, mark and logos are registered trademarks of Bluetooth SIG, Inc. and any use of such trademarks by Radiodetection is under license. Microsoft, Windows Mobile are registered trademarks of Microsoft Corporation, all rights reserved.

Accessories:

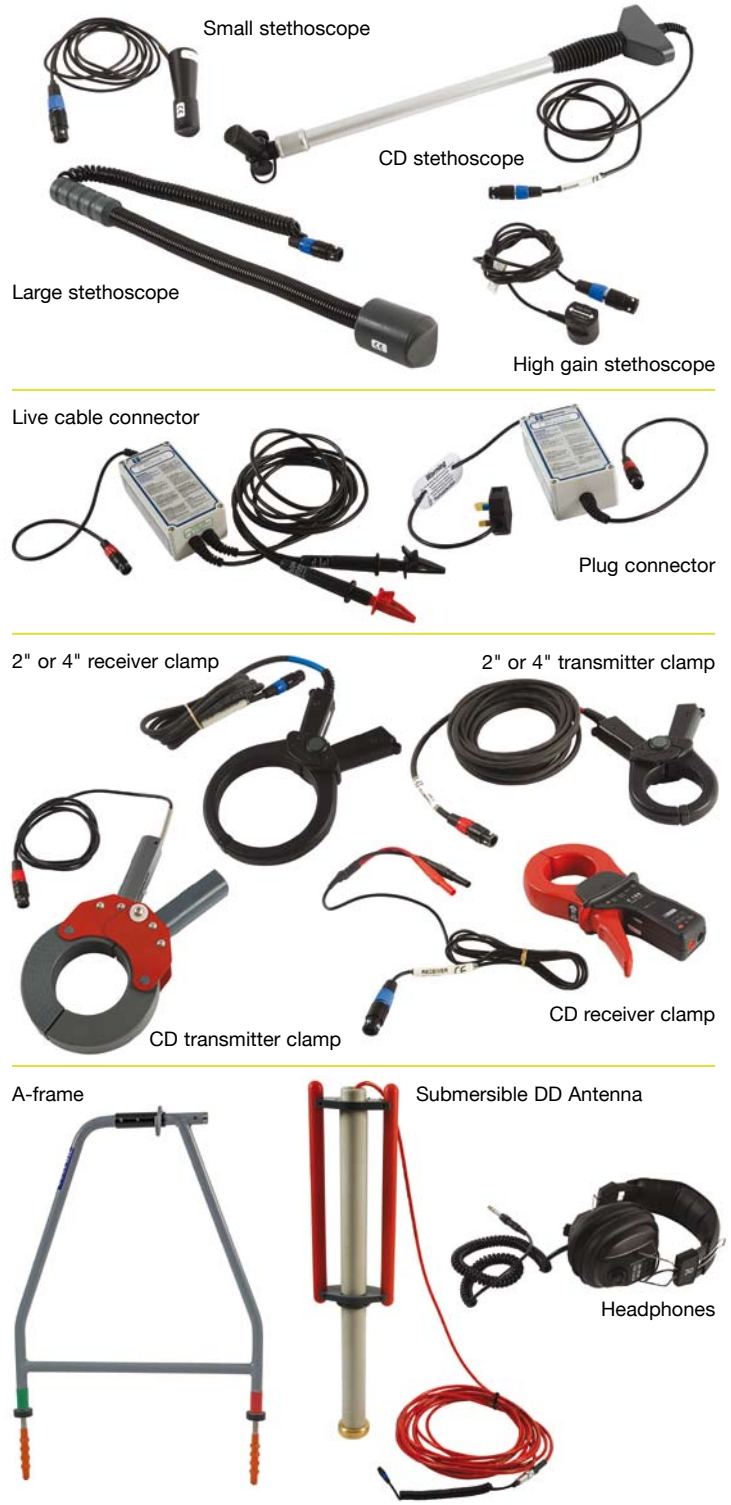



World leaders

Radiodetection is a proud member of the SPX group of companies, which provide technical products and service solutions worldwide.

Radiodetection and its associated companies specialize in the design and manufacture of products for the location and maintenance of underground pipes and cables. Our aim is to be viewed as the supplier of choice of 'high performance' quality equipment using advanced product technologies. We are also committed to both design innovation and customer support.



Technical support

Radiodetection equipment users have easy access to technical support. A call to your regional representative, or the Radiodetection head office, will put you in contact with our team of field-experienced technical experts.



Servicing and repair

Radiodetection has a team of factory-trained service technicians and dedicated service facilities. Turnaround is fast, and costs are very competitive.



Training

Product training for your operators and training personnel is available on your site, or at Radiodetection's headquarters. Training is with qualified instructors and each trainee receives a certificate to confirm they have received the training.

America

Radiodetection

154 Portland Road
Bridgton, ME 04009, USA
Tel: +1 (207) 647 9495
Toll Free: +1 (877) 247 3797
Fax: +1 (207) 647 9496
Email: rd.sales.us@spx.com
Web: www.radiodetection.com

Pearpoint

39-740 Garand Lane, Unit B
Palm Desert, CA 92211, USA
Tel: +1 800 688 8094
Tel: +1 760 343 7350
Fax: +1 760 343 7351
Email: pearpoint.sales.us@spx.com
Web: www.radiodetection.com

Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34
Concord, Ontario L4K 4B7, Canada
Tel: +1 (905) 660 9995
Toll Free: +1 (800) 665 7953
Fax: +1 (905) 660 9579
Email: rd.sales.ca@spx.com
Web: www.radiodetection.com

Europe

Radiodetection Ltd (UK)

Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
Email: rd.sales.uk@spx.com
Web: www.radiodetection.com

Radiodetection (France)

13 Grande Rue, 76220
Neuf Marché, France
Tel: +33 (0) 232 8993 60
Fax: +33 (0) 235 9095 58
Email: rd.sales.fr@spx.com
Web: <http://fr.radiodetection.com>

Radiodetection (Benelux)

Industriestraat 11
7041 GD 's-Heerenberg, Netherlands
Tel: +31 (0) 314 66 47 00
Fax: +31 (0) 314 66 41 30
Email: rd.sales.nl@spx.com
Web: <http://nl.radiodetection.com>

Radiodetection (Germany)

Groendahlscher Weg 118
46446 Emmerich am Rhein, Germany
Tel: +49 (0) 28 51 92 37 20
Fax: +49 (0) 28 51 92 37 520
Email: rd.sales.de@spx.com
Web: <http://de.radiodetection.com>

Asia-Pacific

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building
302-308 Hennessy Road, Wan Chai
Hong Kong SAR, China
Tel: +852 2110 8160
Fax: +852 2110 9681
Email: rd.sales.cn@spx.com
Web: www.radiodetection.com

Radiodetection (China)

Hongfu Mansion, Room 61622
Zheng Ge Zhuang, Bei Qi Jia Town
Chang Ping District
Beijing 102209, China
Tel: +86 (0) 10 8975 5540
Fax: +86 (0) 10 8975 5640
Email: rd.service.cn@spx.com
Web: <http://cn.radiodetection.com>

Radiodetection (Australia)

Unit H1, 101 Rookwood Road,
Yagoona NSW 2199, Australia
Tel: +61 (0) 2 9707 3222
Fax: +61 (0) 2 9707 3788
Email: rd.sales.au@spx.com
Web: www.radiodetection.com

To see the full range of products and services provided by Radiodetection visit:

www.radiodetection.com

Copyright 2011 Radiodetection Ltd - SPX Corporation. All rights reserved. Radiodetection is a subsidiary of SPX Corporation. SPX and Radiodetection are trademarks of Radiodetection Ltd. and SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. The Bluetooth word, mark and logos are registered trademarks of Bluetooth SIG, Inc. and any use of such trademarks by Radiodetection is under license. RD8000 is a Trademark of Radiodetection. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.



Radiodetection[®]
AN SPX COMPANY