




Bicotest

AN SPX BRAND

telecommunications

T617 TDR

telecommunications cable fault locator

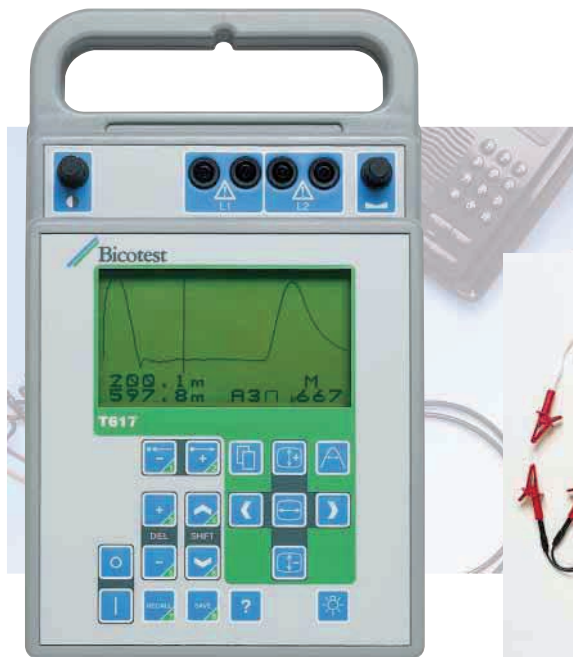

- An advanced full function TDR for field use.
- Features direct controls for common functions, menu controls for less common functions making the product easy to use.
- Cable type defaults in the help menu pre-set the pvf to save time.
- Features 8 test modes for Telecomms use, including Line 1, Differential to Line 2 or Memory, Line 1 comparison to Line 2 or Memory, Crosstalk, Memory only and Line 2 only.
- Accurate to within 0.5m on short range, features a total range maximum of 20km, and a balance control for elimination of the transmit pulse.
- Features Zoom and Wide/Narrow pulse selection by direct control for clear fault identification.
- Six pulse widths auto programmed through range selection.
- The construction features surface-mount, ATE tested board, a shower-proof case with a tough anti-strike acrylic LCD protective window and a metal dome long life tactile keyboard to give unrivalled field reliability and service life.
- The electronics design features a fast, inherently low noise amplifier, and Bicotest's sine-squared pulse shape to give a clean, stable trace devoid of false features for reliable fault location. The amplifier allows a dynamic range right up to 84dB.
- The display is a wide temperature range LCD and features an LED type backlight for clear information at all times.
- Help facility features a cable library, sample traces, help operating text, long range trace levelling filter for Telecomms cables, trace marker feature for multiple cable sections, units adjustment between metres, feet and time, and dielectric type selection between pvf, V and V/2.
- Battery saving software features auto time outs of the instrument and backlight to give up to 20 hours continuous use.

AS CLOSE AS YOU CAN GET TO FAULTLESS CABLE PERFORMANCE

Specifications

T617

RANGES :	0-24 m to 0-20 km in 11 ranges with zoom facility (except on lowest range) (PVF 0.67)
ACCURACY :	± 0.24% of range at 20 kms
RESOLUTION :	± 0.1% of range at 20 kms
PROPAGATION VELOCITY :	PVF : 0.300 to 0.999 V : 90 to 300 m/µs V/2 : 45 to 150 m/µs
GAIN :	0-84 dB max, selectable in 6dB steps Maximum sensitivity 4 mV full scale
PULSE CHARACTERISTICS :	Amplitude : Nominally 20 V into 100 Ohms Width : 6 pulse widths 24 ns to 2.25 µs auto selected with range. Choice of wide or narrow on each range (not 24m). Output Impedance : 100 Ohms Balance Control : 0 to 220 Ohms
OUTPUT :	Sockets : 2 pairs 4mm Banana, 19mm spacing Protection : The T617 will not be damaged by application of 300 V rms, 0-60 Hz to the inputs. For safety reasons it should NOT be touched or operated under these conditions.
DISPLAY :	Type : High resolution LCD with backlighting (switchable, auto off) Cursor : Solid vertical line Marker : Dotted vertical line
MODES :	Real time : Line 1, Line 2, Line 1 and Line 2 (dual), Line 1 minus Line 2 (differential), X-Talk (locates crosstalk on telephone cables) Memory : Line 1 and Memory (dual), Line 1 minus Memory (differential), Memory only
MEMORY :	Single memory that retains information until overwritten
POWER :	"C" size cells - 20hrs typical use from LR14 Alkaline cells (Auto Power-Off 5 mins after last key operation).
ENVIRONMENTAL :	Water Ingress : IP54 Operating Temperature : -5°C to +50°C Storage : -20°C to +65°C Humidity : 93% at +40°C
SAFETY :	BS EN 61010/IEC 61010, BS EN 41003
SIZE (mm) :	75 x 180 x 300 mm inc handle
WEIGHT (kg) :	2.7 kg inc battery
DELIVERY INCLUDES :	Weatherproof Shoulder Bag, one set of batteries, 2 x 2 m Test Leads, Operating Manual
ORDERING DETAILS :	T617: Language variants available
WARRANTY:	1 year (2nd year available as an option)



Key features

- Full function easy to use TDR cable fault locator.
- For Telecomms applications.
- Direct keys for common functions, software controls for less common functions.
- Large, clear display.
- Highly reliable construction featuring surface mount pcb, tough all-weather case, protected LCD, low noise amplifier and Bicotest's sine-squared output pulses.
- Locates and measures bridge taps, splits and resplits, wet cable, opens and shorts, high resistance joints.

Whilst every care is taken that the information contained in this publication is correct, no legal responsibility can be accepted for any inaccuracy. The company reserves the right to alter or modify the information contained herein at any time.
© Radiodetection Ltd. 2007 All rights reserved.

Radiodetection Ltd. Western Drive, Bristol. BS14 0AF United Kingdom
Tel: +44 (0) 117 976 7776 Fax: +44 (0) 117 976 7775 E-mail: rd.sales.uk@spx.com

Radiodetection. 154 Portland Road, Bridgton, ME 04009 USA
Tel: (207) 647 9495 Toll Free: (877) 247 3797 Fax: (207) 647 9496
E-mail: rd.sales.us@spx.com

World leaders



Radiodetection is a proud member of the SPX group of companies, which provide technical products and service solutions worldwide.

Radiodetection and its associated companies specialize in the design and manufacture of products for the location and maintenance of underground pipes and cables. Our aim is to be viewed as the supplier of choice of 'high performance' quality equipment using advanced product technologies. We are also committed to both design innovation and customer support.

Technical support



Radiodetection equipment users have easy access to technical support. A call to your regional representative, or the Radiodetection head office, will put you in contact with our team of field-experienced technical experts.

Servicing and repair



Radiodetection has a team of factory-trained service technicians and dedicated service facilities. Turnaround is fast, and costs are very competitive.

Training



Product training for your operators and training personnel is available on your site, or at Radiodetection's headquarters. Training is with qualified instructors and each trainee receives a certificate to confirm they have received the training.

America

Radiodetection

154 Portland Road
Bridgton, ME 04009, USA
Tel: +1 (207) 647 9495
Toll Free: +1 (877) 247 3797
Fax: +1 (207) 647 9496
Email: rd.sales.us@spx.com
Web: www.radiodetection.com

Pearpoint

72055 Corporate Way
Thousand Palms CA 92276, USA
Tel: +1 800 688 8094
Tel: +1 760 343 7350
Fax: +1 760 343 7351
Email: pearpoint.sales.us@spx.com
Web: www.radiodetection.com

Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34
Concord, Ontario L4K 4B7, Canada
Tel: +1 (905) 660 9995
Toll Free: +1 (800) 665 7953
Fax: +1 (905) 660 9579
Email: rd.sales.ca@spx.com
Web: www.radiodetection.com

Europe

Radiodetection Ltd (UK)

Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
Email: rd.sales.uk@spx.com
Web: www.radiodetection.com

Radiodetection (France)

13 Grande Rue, 76220
Neuf Marché, France
Tel: +33 (0) 232 8993 60
Fax: +33 (0) 235 9095 58
Email: rd.sales.fr@spx.com
Web: <http://fr.radiodetection.com>

Radiodetection (Benelux)

Industriestraat 11
7041 GD 's-Heerenberg, Netherlands
Tel: +31 (0) 314 66 47 00
Fax: +31 (0) 314 66 41 30
Email: rd.sales.nl@spx.com
Web: <http://nl.radiodetection.com>

Radiodetection (Germany)

Groendahlscher Weg 118
46446 Emmerich am Rhein, Germany
Tel: +49 (0) 28 51 92 37 20
Fax: +49 (0) 28 51 92 37 520
Email: rd.sales.de@spx.com
Web: <http://de.radiodetection.com>

Asia-Pacific

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building
302-308 Hennessy Road, Wan Chai
Hong Kong SAR, China
Tel: +852 2110 8160
Fax: +852 2110 9681
Email: rd.sales.cn@spx.com
Web: www.radiodetection.com

Radiodetection (China)

Hongfu Mansion, Room 61622
Zheng Ge Zhuang, Bei Qi Jia Town
Chang Ping District
Beijing 102209, China
Tel: +86 (0) 10 8975 5540
Fax: +86 (0) 10 8975 5640
Email: rd.service.cn@spx.com
Web: <http://cn.radiodetection.com>

Radiodetection (Australia)

Unit 14, 5-7 Prosperity Parade
Warriewood NSW 2102, Australia
Tel: +61 (0) 2 9979 8555
Fax: +61 (0) 2 9979 7733
Email: rd.sales.au@spx.com
Web: www.radiodetection.com

To see the full range of products and services provided by Radiodetection visit:

www.radiodetection.com

Radiodetection products are under continuous development and are subject to change, we reserve the right to alter or amend any published specification without notice.
Copyright 2008 Radiodetection Ltd. - SPX Corporation. All rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation.



Radiodetection
AN SPX COMPANY